

---

**613088**

FTR70G7

**GAS GRIDDLE WITH 1/3 RIBBED PLATE (TOP VERSION)**

---



- Gas griddle with steel 2/3 smooth and 1/3 ribbed steel plate (70 cm top version).
- Horizontal cooking plate (12 cm thick), 2 independent work areas.
- Grease and liquid collection grooving with cap.
- Heating through 2 7 kW 2-branch chrome-plated steel burners.
- Valved tap with maximum temperature of 390°C.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Appliances intended for direct cooking.
- Cooking plate hermetically sealed to the worktop.
- Ignition through a piezoelectric device with a water protection cap.
- Pilot burner and safety thermocouple.
- Grooving with a cap and removable drawer for collecting grease and liquids.
- Removable splashback on 3 sides included.
- Technical compartment for easy connection to the gas network.
- Gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The equipment is delivered in accordance with the customer's specifications in terms of installed nozzles, even during testing. G20 natural gas is the standard configuration. In addition, spare nozzles are included should conversion be necessary on site.

## TECHNICAL DATA

|                           |                           |                           |                       |
|---------------------------|---------------------------|---------------------------|-----------------------|
| TOTAL POWER               | 14 kW                     | GAS POWER                 | 14 kW                 |
| NATURAL GAS CONSUMPTION   | 1,48 m <sup>3</sup> /h    | COOKING SURFACE           | 69,6x56,4 cm          |
| PLATE TYPE                | 1/3 ribbed and 2/3 smooth | HEATING ZONES             | n° 2                  |
| CE GAS CERTIFICATE NUMBER | CE-0085BO0093             | GAS CONNECTION DIAMETER   | 1/2"G EN10226-1       |
| GAS CONNECTION HEIGHT (H) | 26 mm                     | GAS CONNECTION HEIGHT (X) | 657 mm                |
| GAS CONNECTION HEIGHT (Y) | -78 mm                    | FOOT HEIGHT               | 25 mm                 |
| FOOT ADJUSTMENT           | 15/25 mm                  | WIDTH                     | 70 cm                 |
| DEPTH                     | 70 cm                     | HEIGHT                    | 28 cm                 |
| PACKAGE WIDTH             | 77,0 cm                   | PACKAGE DEPTH             | 81,0 cm               |
| PACKAGE HEIGHT            | 53,0 cm                   | NET WEIGHT                | 62,4 kg               |
| GROSS WEIGHT              | 69,8 kg                   | VOLUME                    | 0,3300 m <sup>3</sup> |
| HARMONISED CODE           | 84198180                  | LPG CONSUMPTION           | 1.1 kg/h              |
| LATENT HEAT RELEASE       | 5600.0 W                  | SENSIBLE HEAT RELEASE     | 4900.0 W              |
| STEAM RELEASE             | 8232.0 g/h                |                           |                       |

## ACCESSORIES

|        |                                    |
|--------|------------------------------------|
| 120595 | GRIDDLE-CLEANING SCRAPER           |
| 120597 | SCRAPER - SPARE BLADE KIT (10 PCS) |
| 619005 | PAIR OF JOINTS FOR GRIDDLES        |

INSTALLATION SCHEMES

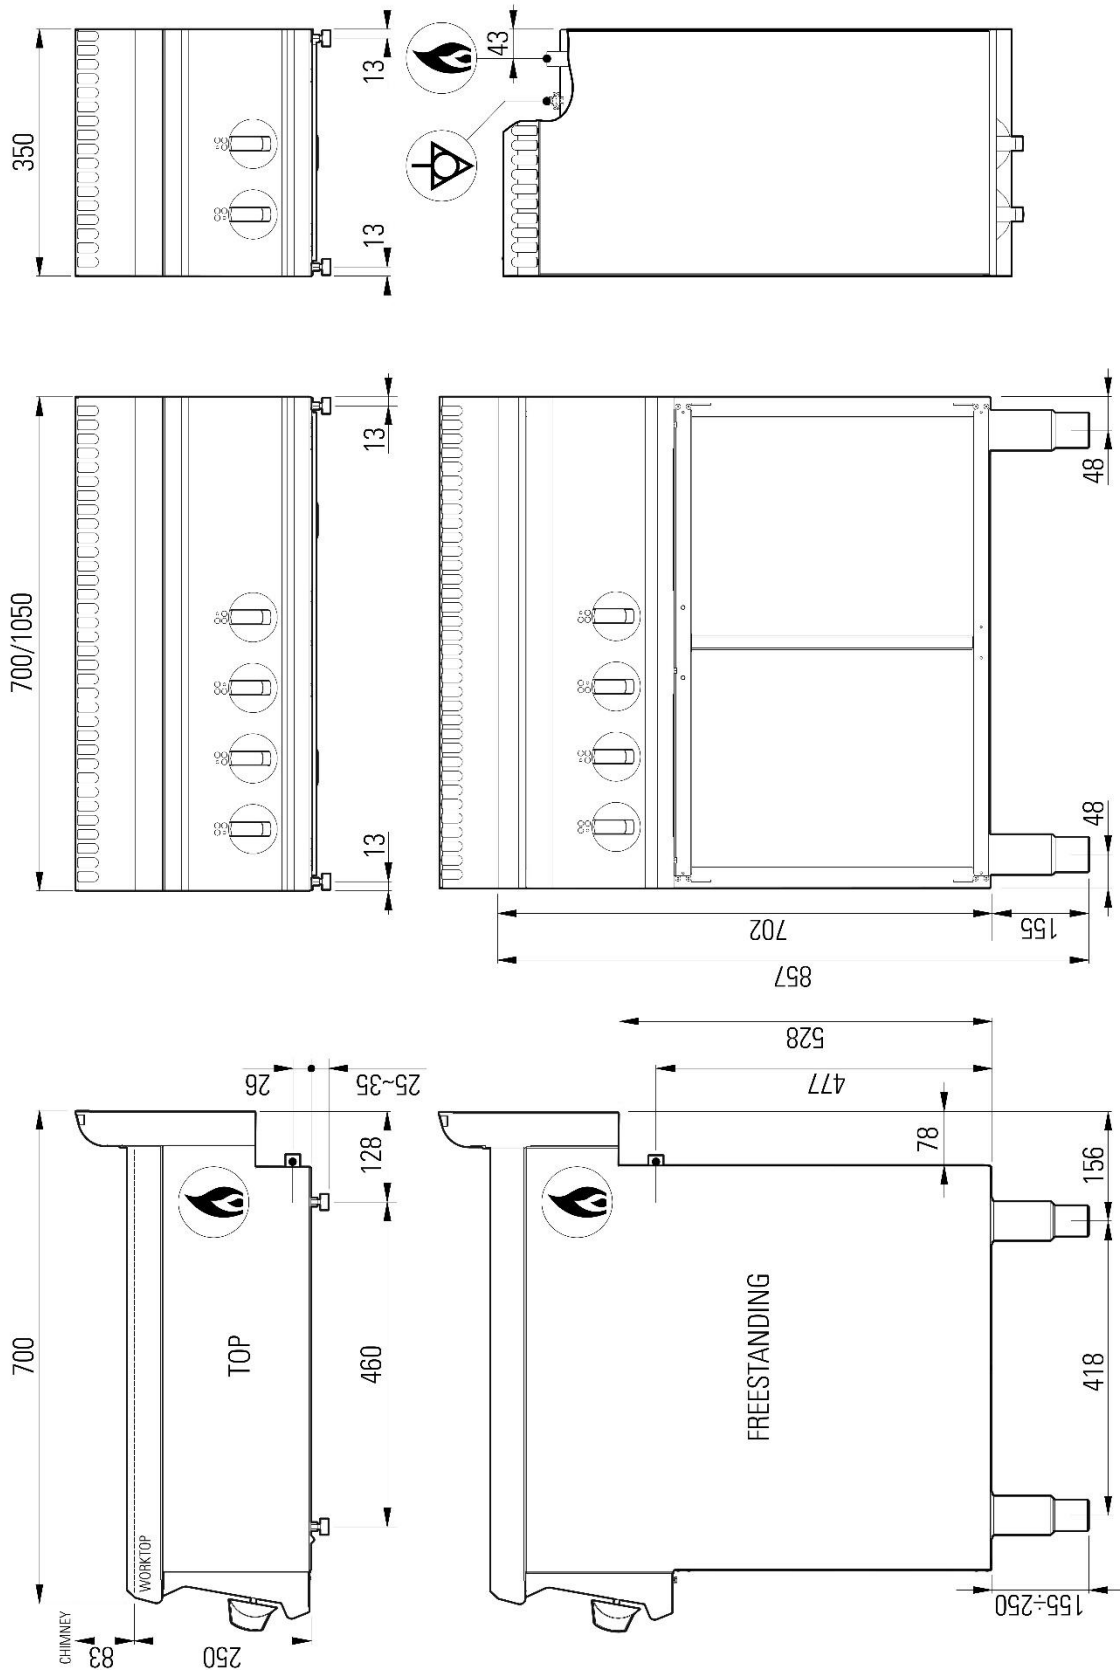


Fig.1 | Abb.1 | рис.1 - 5415.550.00