


SCHNITTZEICHNUNG



KBS Gastrotechnik GmbH – Schoßbergstraße 26 – 65201 Wiesbaden

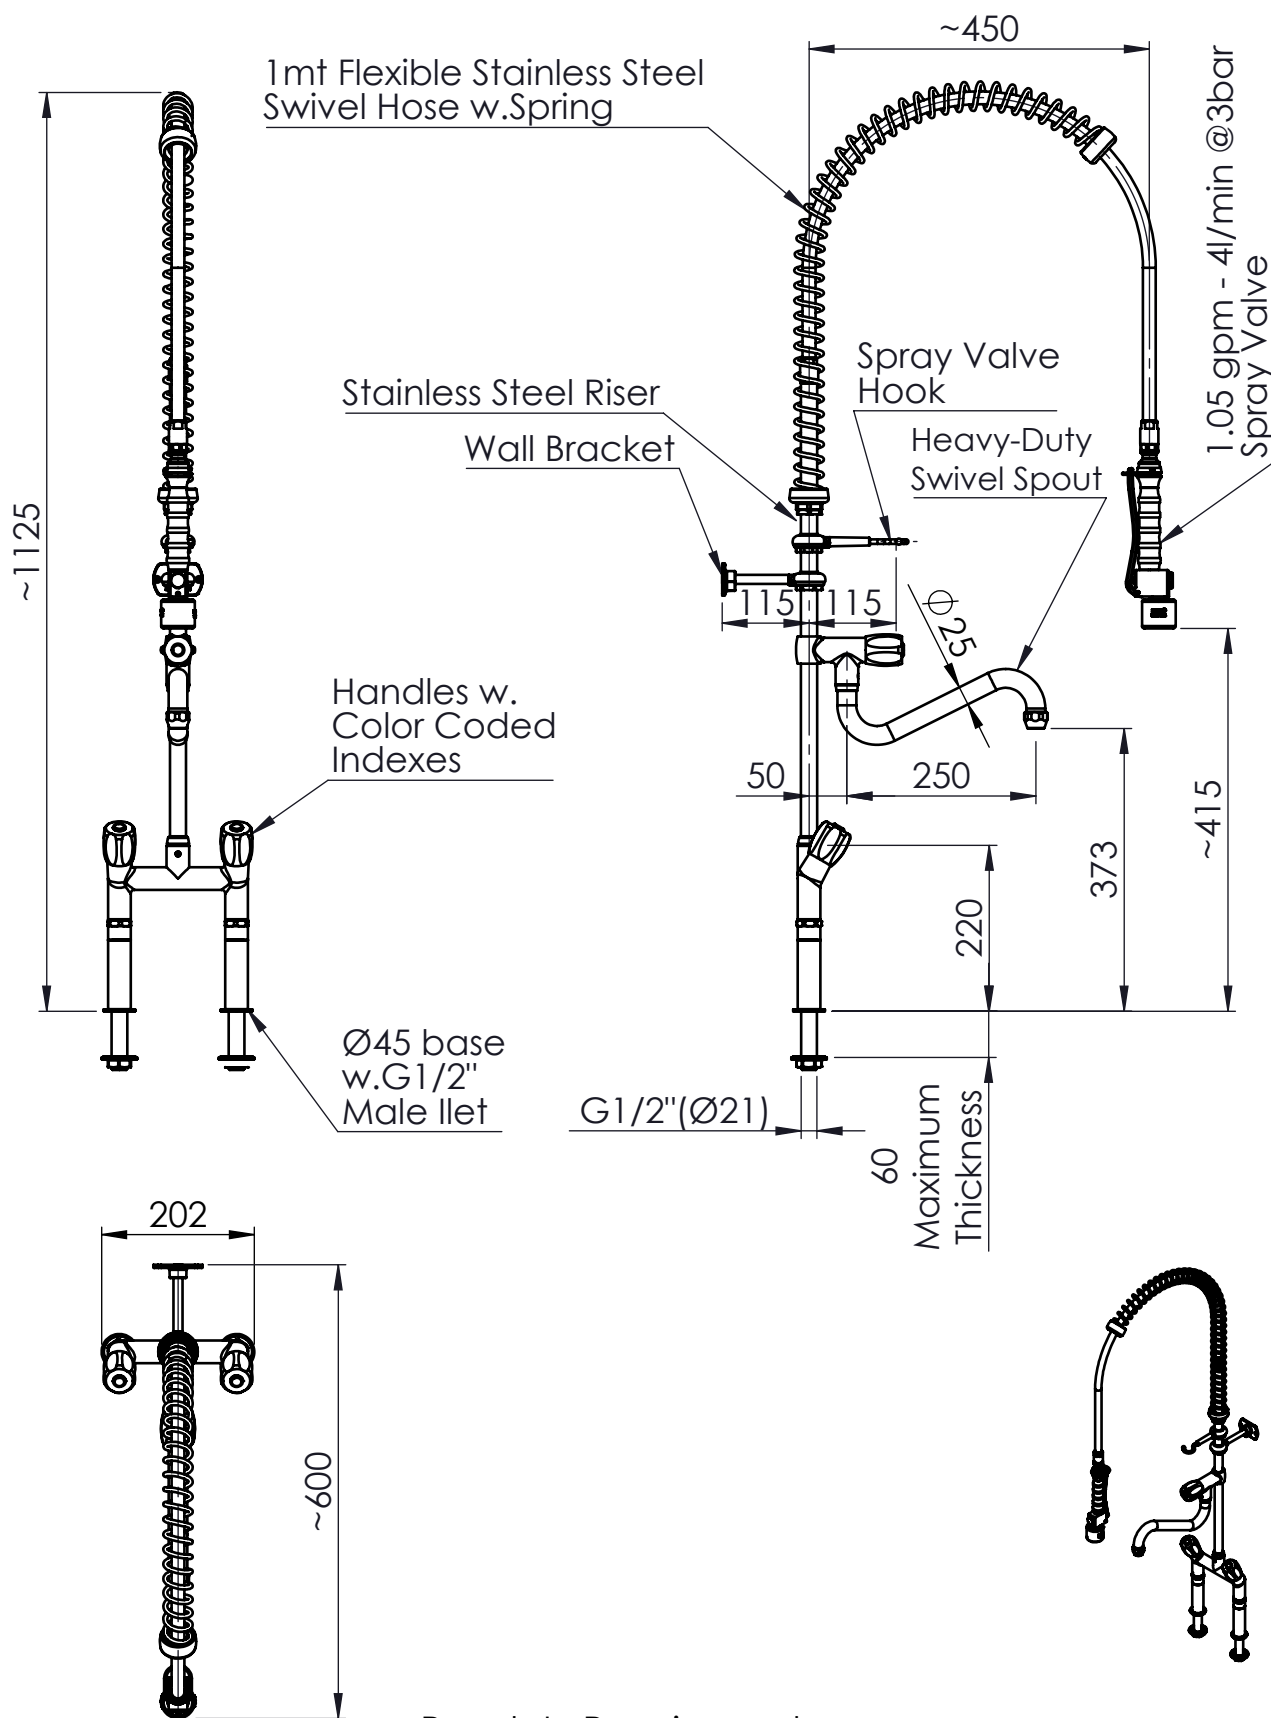

Rough-In Requirement:
23mm Mounting Hole

TITLE / DESCRIZIONE

Elevated double-hole (155mm center distance) slanted, mixing temperature, deck mount Pre-Rinse Unit with 100mm risers, riser add-on faucet with 250mm swivel nozzle (Ø 25mm). 80mm-long mounting shanks, G1/2" male inlets with check valves, G3/4" high flow ¼ turn ceramic headworks, riser tube – stainless steel, brass, chrome plated. L/min KLARCO Low-Flow spray valve

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS	CHD / VER	APPR
SCALE / SCALA 1:10	DATE / DATA 03/03/2020	SHEET / PAG 1 of 2
NUMBER / CODICE DIS.	MODEL / PRODOTTO 3E.3016.4L.11	